

Professional Switch Power Amplifier 开关电源专业功率放大器

	PB-10H	PB-20H	PB-30H	PB-60H	PB-3CH	PB-4CH
Output Power Stereo 输出功率 (8 Ohms)	2x350W	2x600W	2x800W	2x1200W	2x500W+1200W	4x500W
Output Power Stereo 输出功率 (4 Ohms)	2x550W	2x900W	2x1200W	2x1800W	2x700W+1200W	4x700W
Bridge 8 Ohms 桥接	1000W	1800W	2400W	3600W	1300W+1200W	2x1300W
Weight 重量 (kg)	14	13.8	13.8	16	16	16.5

PB-10H)))

PB-20H)))

PB-30H)))


PB-60H)))

Frequency response 频响	20Hz-20KHz(± 0.5 dB)
Input sensitivity/impedance 输入灵敏度/阻抗	0 dB(0.775Vrms)/30K Ω
SNR 信/噪比 (计权)	>95dB
THD+N 总谐波失真	0.08% @1KHz
TIM	0.1% 8ohms, 1 KHz@1w
Slew rate 转换速率	>20V/us
Damping Factor 阻尼系数1KHz, 8欧	>250:1(@1KHz/8 Ω)
Crosstalk 声道分离	80 dB@1KHz
Overload/short circuit/lack voltage. Electrical protection 过载/短路/欠压全电子保护	
Supply voltage 电源电压	AC 220-240Vnm
GAIN 增益	± 20 dB
Height 高度	2U
Rack size WxDxH (mm) 尺寸	485x88x485

PB-3CH)))

PB-4CH)))

Frequency response 频响	20Hz-20KHz(± 0.5 dB)
Input sensitivity/impedance 输入灵敏度	0 dB(0.775Vrms)/30K Ω
SNR 信/噪比 (计权)	>100 dB
THD+N 总谐波失真	0.08% @1KHz
TIM	0.1% 8ohms, 1 KHz@1w
Slew rate 转换速率	>30V/us
Damping Factor 阻尼系数1KHz, 8欧	>250:1(@1KHz/8 Ω)
Crosstalk 声道分离	90 dB@1KHz
Overload/short circuit/lack voltage. Electrical protection 过载/短路/欠压全电子保护	
Supply voltage 电源电压	AC 220-240V
GAIN 增益	± 20 dB
Height 高度	2U
Rack size WxHxD (mm) 尺寸	485x88x485

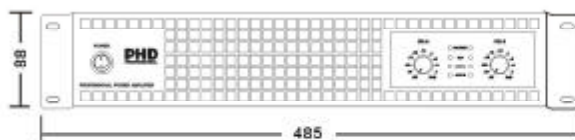

Front



Top