

CMD-6109

Headphone with Talkback Microphone



FUNCTION DIScription

- Could be used as the monitor's peaking in the conference
- Used in the conference system can avoid influencing others
- With 1.5m connect line
- Nhigh didelity timbre

TECHNICAL PARAMETER

Earphone	
unit input	3.5mm
Frequency response	80Hz - 2KHz
Sensitivity	90dB
S/N Ratio	> 80dB
Distortion	< 0.1dB
Impedance	32Ω
Dynamic range	> 85 dB
Output power	100mW
Microphone	
microphone type	back electret high sidpersion style
output impedance	600 Ω
frequency response	60Hz - 8KHz
reference microphone distance	20 - 200cm
connect style	imblance
sesitivity	22dB ± 3dB
dispersion	cordate
colour	black

CMD-L SERIES
System Signal Cable




PRODUCT INSTUCTION

- CMD-L005 is 5m connecting cable
- CMD-L010 is 10m connecting cable
- CMD-L020 is 20m connecting cable
- CMD-L100 is 100m connecting cable

FUNCTION DIScription

- Used for the connection of the master conference system and the master extending system or the connection of the conference unit or as the extending cable
- Selectable cable for 5m,10m,20m and 100m
- 13P DIN cable,a male and a female connector
- Ntransmission distance max 1000m

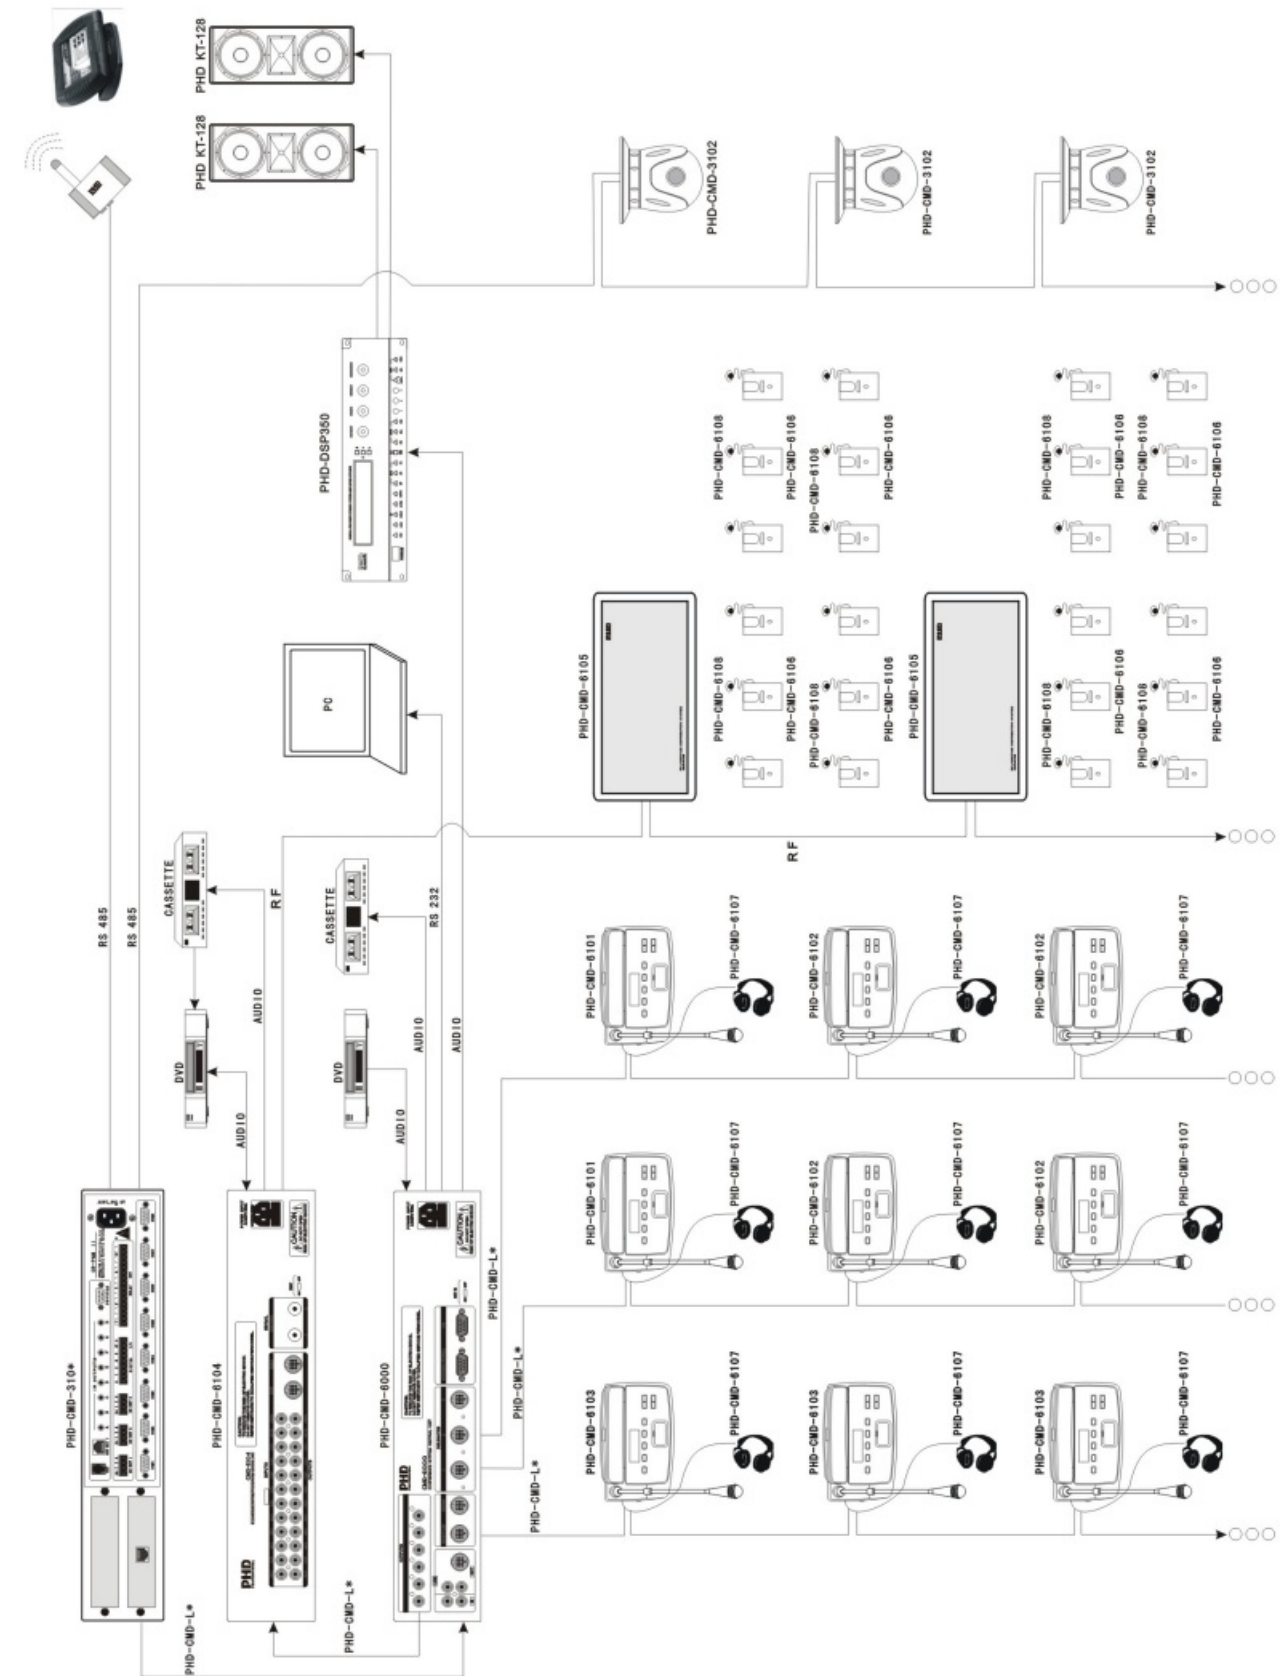

system connecting graph